




Aim: To remove a fader module PCB for replacement or service.

Tools:  T20 (PZ2 demo units).  PZ1.


Requirements:  An assistant will be required to lift the fader panel.

1. Remove fader panel. Section 1.07

2. Remove the x16 Pozi 1 screws and fader knobs.

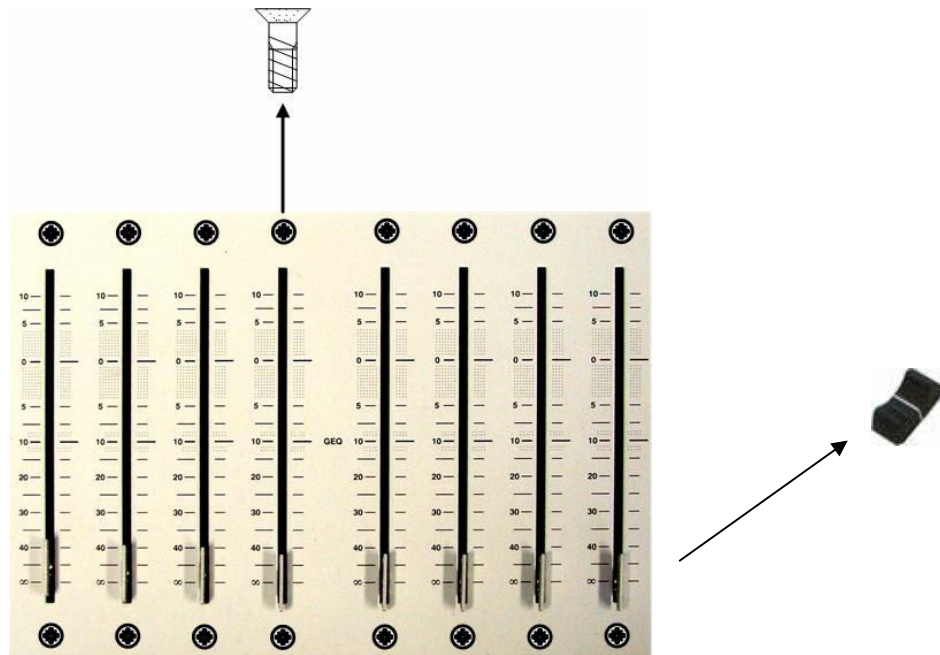

3. Disconnect the 34 pin fader control harness and DC cable.

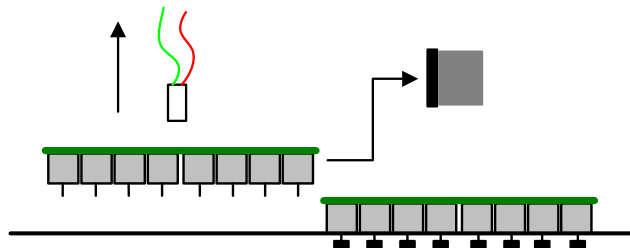

4. The fader module PCB can now be removed from the fader panel.