

**ALLEN&HEATH**

**TECHNICAL SHEET**

**XONE:92**

**Top panel removal**

Copyright © 2009 Allen & Heath Limited. All rights reserved

Allen & Heath Limited

Kernick Industrial Estate, Penryn, Cornwall, TR10 9LU, UK


<http://www.allen-heath.com>

1. Remove all the screws from the perimeter.....




.....and the x4 screws from the RCA phono/line connectors.

2. Lift the front of the top panel carefully. Inside you will see the PSU harness.

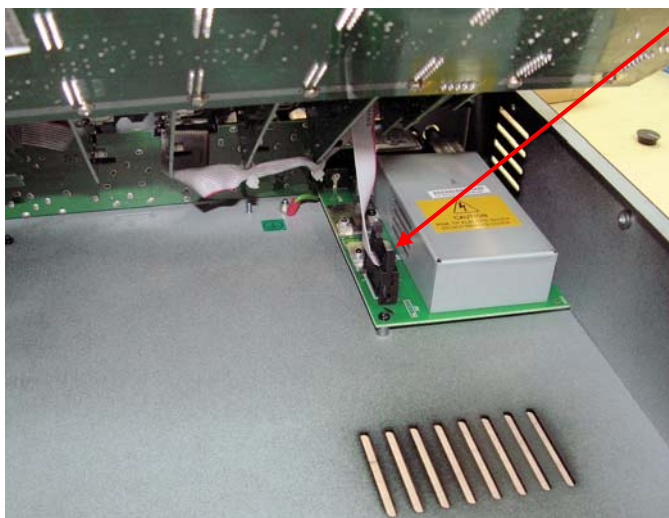

3. Un-clip the harness and disconnect it.

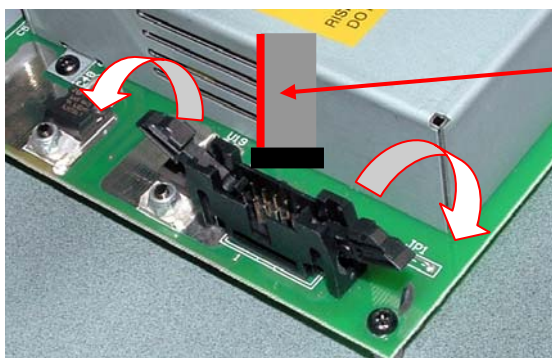


*Red stripe to rear of mixer.*

4. You can now lift the top panel a little farther.

**Beware!** There are two more harnesses. These do not have clips.

If you do not need to disconnect these, ensure that they are OK before you refit the top panel.

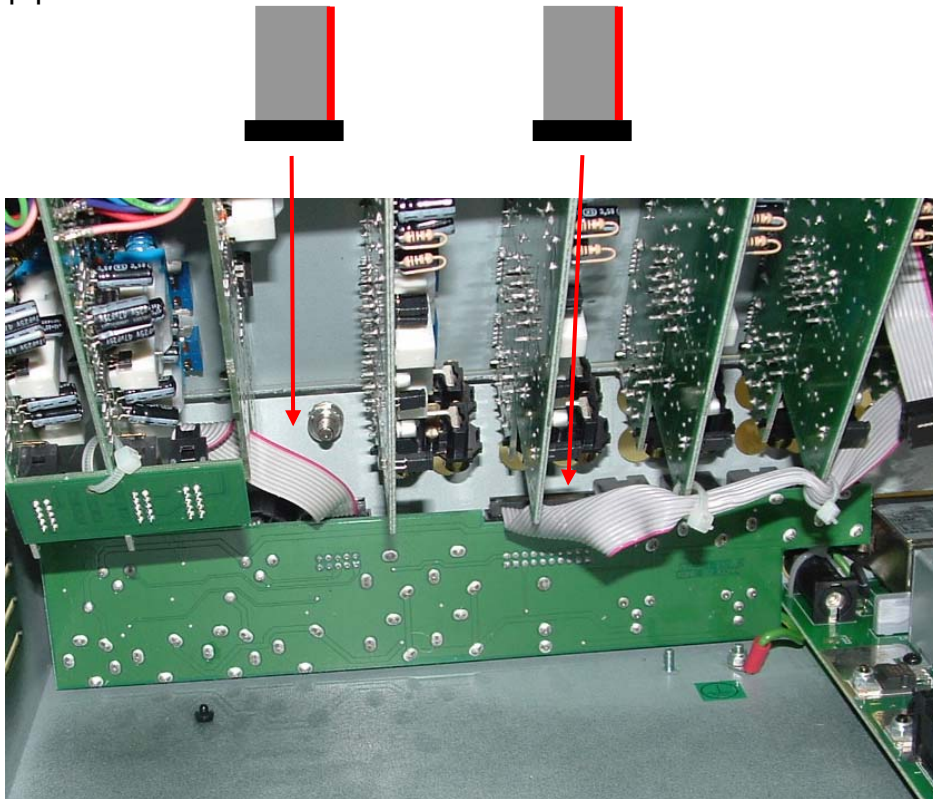

5. Ensure that all harnesses are correctly fitted.

6. Fully test the unit before fitting all screws.