



This release provides updated Operating Firmware for your XONE:DB4

Xone Product **XONE:DB4**
Operating Firmware **v2.2.2** [DB4_2_2_2.fxu]

Supported OS: N/A: INSTALLATION VIA USB KEY*

v2.2.2 Operating System Firmware

New Operating Firmware updates the XONE:DB4 DSP and control response. This update implements new functionality, improvements and fixes. X:Link data transfer optimized for Serato DJ

See p.3 for software changelog details

Updating XONE:DB4 Operating Firmware

PLEASE FOLLOW INSTALL & UPDATE INSTRUCTIONS CAREFULLY

Step 1: Check & Download Operating Firmware

- ① Check current Operating Firmware; (CodeVersion):
- ☞ Go to: **MENU > ABOUT**
 - The screen also displays the unique eID number of your XONE:DB4.
 - Download the latest Operating Firmware for your XONE:DB4 mixer
- 🌐 Go to: www.allen-heath.com/xonedb4
- 🖱️ Click **SOFTWARE**
- 🖱️ Click **OPERATING FIRMWARE**
- 🖱️ Click on the CURRENT VERSION link; **XONE:DB4 FIRMWARE V2.2.2 (DEC2015)**



- 🖱️ Read, then 'Accept' the GENERAL EULA to enable the download.
- 🖱️ Select 'Save File' and click 'OK' to download the .zip bundle
- 🖱️ Expand the saved .zip and copy the file **DB4_2_2_2.fxu** to a USB key*.

- ① *Use a good quality key, minimum size: **1GB**;
Backup any files you need to keep, then format the key using FAT32.

! Ensure the XONE:DB4 mixer is **disconnected** from your computer


This release provides updated Operating Firmware for your XONE:DB4

PLEASE FOLLOW INSTALL & UPDATE INSTRUCTIONS CAREFULLY

Xone Product **XONE:DB4**
 Operating Firmware **v2.2.2** [FWUpdater_XONE_DB4_2.2.2]

Step 2: Update Operating Firmware

- 🔗 Extract the new firmware file:
DB4_2_2_2.fxu
- 🔗 Copy to the root directory of the USB key.
- 👉 Connect the key to USB socket on the XONE:DB4 top panel.
- 👉 Open the LCD display **MENU**
- 👉 Scroll down & Press to select **FIRMWARE**
- 👉 Scroll down & Press to select **Load File**
- The display will prompt you to confirm you want to run the update.
- 👉 Scroll down & Press to select **YES** and start the Operating Firmware update.
- The screen will display a progress bar.
- ! **DO NOT switch OFF or interrupt power supply or connection to your XONE:DB4 while update is in progress.**
- When the update is complete, the mixer will reboot automatically.
- ✓ **v2.2.2 XONE:DB4 Operating Firmware update is now complete.**

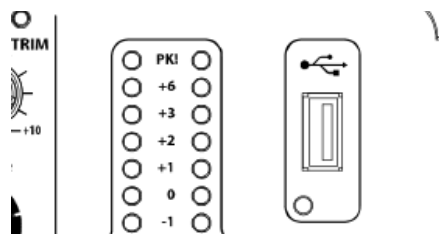

If the mixer freezes during update, or following the reboot, it can be forced into a hard reset as follows:

- 👉 Power the mixer **OFF** using the rear panel power switch.
- 👉 Press and hold down the **MENU** button.
- 👉 Keeping the **MENU** button depressed, power the mixer back **ON**.
- 👉 Hold the **MENU** button down for 5 to 8 seconds, then release.
- ! **After the mixer reboots, MENU settings will be reset to default options**
- ① Check new code version as outlined in Step1 above

If you have any problems with installation, please contact **A&H Product Support:**

<http://support.allen-heath.com>



This release provides updated Operating Firmware for your XONE:DB4

Xone Product **XONE:DB4**
Operating Firmware **v2.2.2** [DB4_2_2_2.fxu]

Supported OS: N/A: INSTALLATION VIA USB KEY*

v2.2.2 Operating System Firmware

New Operating Firmware updates the XONE:DB4 DSP and control response.

This update implements new functionality, improvements and fixes.

X:Link data transfer optimized for Serato DJ

Software Change Log

DB4 v2.2.2:

- ✓ DBFOUR-41 NEW: Channel Filter Resonance tapering
- ✓ DBFOUR-48 NEW: MIDI SHIFT note on/note off
- ✓ DBFOUR-63 NEW: X/Y Filter Resonance tapering

Resolved issues:

- ✓ DBFOUR-11 Improved: Control response
- ✓ DBFOUR-24 Improved: EQ Filter Mode HPF/LPF cut-off
- ✓ DBFOUR-67 Improved: optimized LED display
- ✓ DBFOUR-72 Improved: X:Link data transfer optimized for Serato DJ
- ✓ DBFOUR-73 Improved: Control response
- ✓ DBFOUR-77 Improved: Filter Mode HPF roll-off

Known issues:

- ⓘ Setup files created in v1.00-v2.00 are incompatible with v2.2.2