

Firmware Loader

Downloading the Driver

In order for you to up-date either using a PC or a MAC computer you'll need to load the new Driver onto your computer. Driver version 3.3.4 and above has the ability to up-date the firmware through the Firewire connection. You will also need to have the latest issue firmware bin file.

The installer software and bin file is available on the Allen & Heath website at:

<http://www.allen-heath.com/zed/>




First you need to uninstall any previous version of driver.

If uninstalling 3.1.1 need to see document Manual Removal of ZedR as well.

For installing the driver please see the PC or MAC Driver Installation Document :



Once the new driver has been installed connect mixer to the PC/MAC and follow the instructions below .

Open the control panel and click on the Firmware Loader Tab, this takes you to the upload section, click show details, this shows the present firmware version information, this is a new feature so v1.0 and v1.1 show the same information Vender: 0 Product: 0 SDK 3.0.0.0 APP 0.0.0.0.

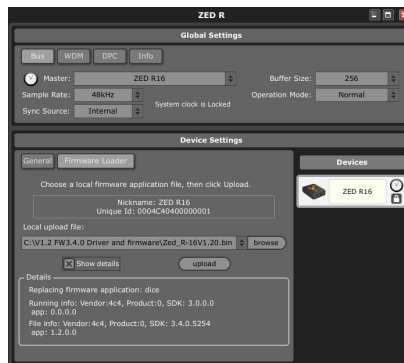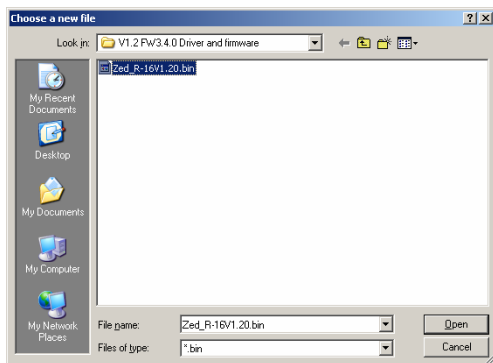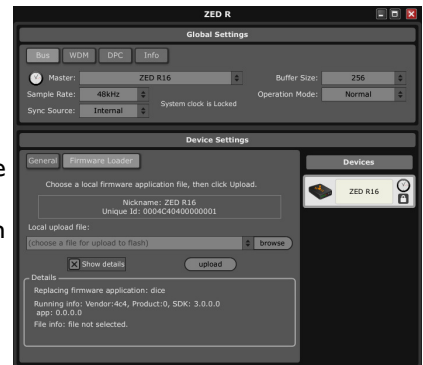

Now you need to click on Browse and point to the new firmware's bin file, once selected click upload this will start the process of updating firmware.

IT IS VERY IMPORTANT THAT YOU DO NOT SWITCH MIXER OR THE PC/MAC OFF DURING THIS PROCESS.

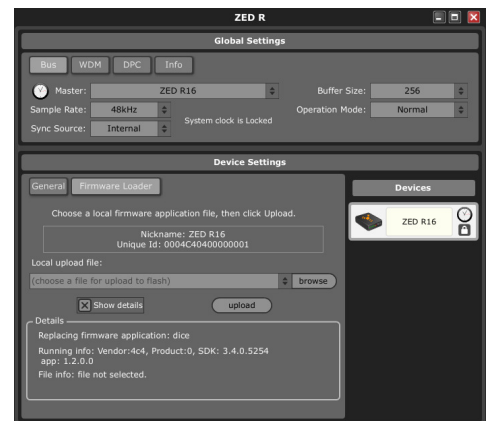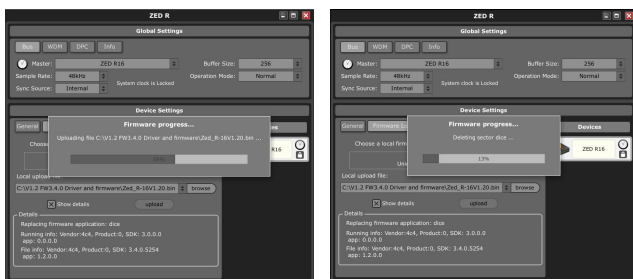

When finished wait 10 seconds then close the control panel and switch off mixer for 5 seconds, then switch back on, wait for desk to connect then reopen control panel, device firmware can now be checked by clicking on the firmware loader tab again and then show details, should now show Vender: 4C4 Product: 0 SDK: (ver number) APP: (ver number) if so product has been updated successfully.