


Aim: To remove the MixRack back plane PCB for service or replacement.

Tools:  T10  Module extractor tool supplied with Mixrack.

1. Remove all modules from Mixrack.

2. Disconnect harnesses from back plane.

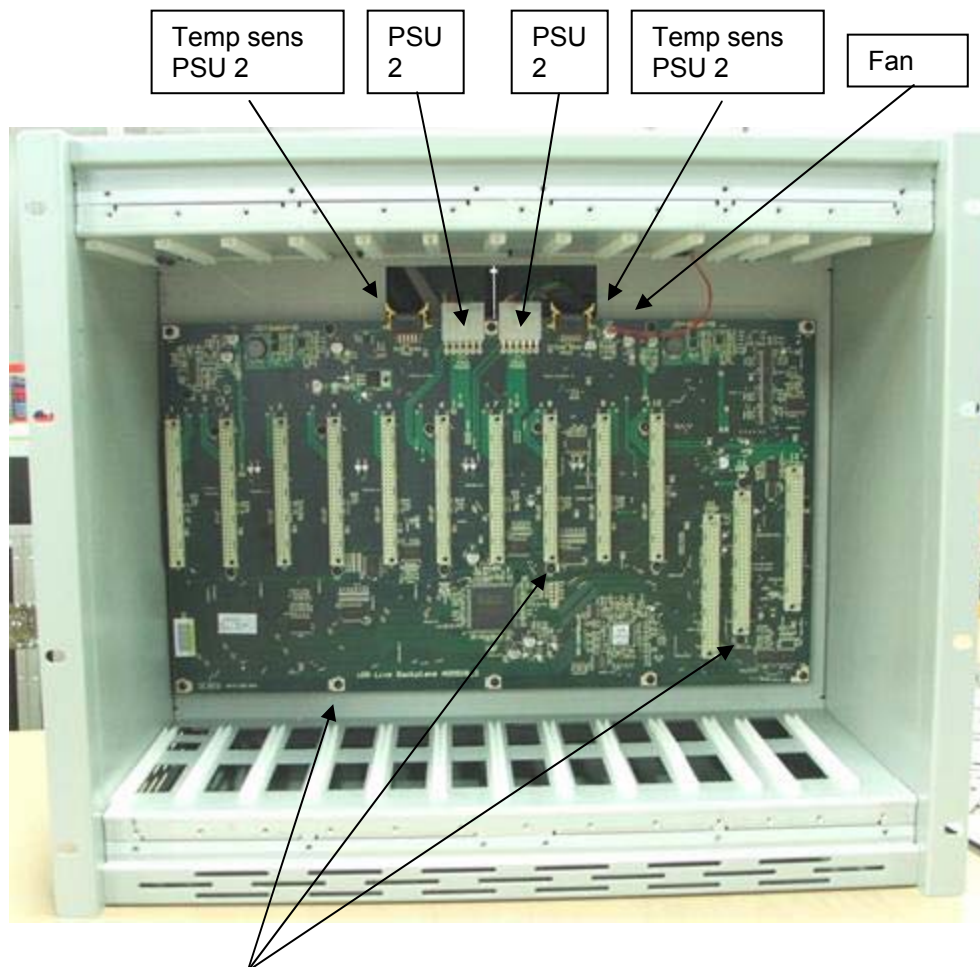

3. Remove T10 screws (x22) from back plane and withdraw the PCB.

4. On re-assembly, check all screws and harnesses including the fan harness.