

XONE:DB4 Firmware v2.01 Release Notes

FIRMWARE UPDATING


Firmware is available for download from our website:

<http://www.allen-heath.com/>


The currently installed firmware version (**Code Version**) can be displayed by selecting the “About” screen in the menu. This screen also displays the unique **eID** number for your DB4.

Use a good quality USB key between 32MB and 4GB in size.
Copy any files that you need to keep, then format the key using FAT32.

Unzip the new firmware file to this key and plug the key into the USB socket on the mixer’s front panel.

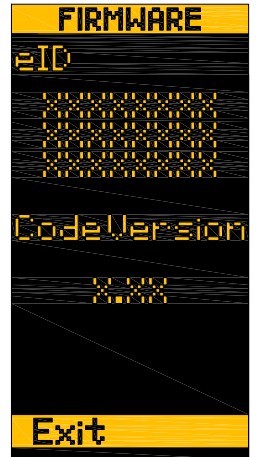

Open the menu and scroll down to FIRMWARE, and select this option.
Select “Load File”, and the screen will ask you to confirm that you want to continue.

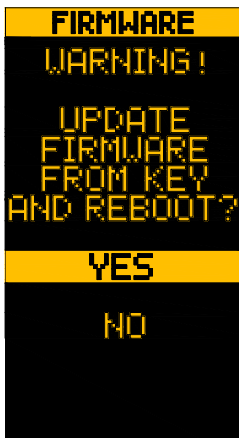

Select “YES” and firmware updating will begin. The screen will change to show a progress bar.

When the update is complete, the mixer will restart automatically.
Avoid powering the mixer off whilst the update is in progress.



If the mixer freezes during the update or after the reboot, it can be forced into a hard reset by turning the mixer off at the power switch, then pressing and holding down the menu button whilst turning the mixer back on. Hold the ‘MENU’ button down for five to eight seconds and then release.

ALLEN&HEATH

SOFTWARE RELEASE NOTES

XONE: DB4 Firmware v2.01 (Maintenance release)

New features:

- MIDI Start/Stop messages implemented for NI Traktor external sync support

Resolved issues:

- Spurious MIDI

Note: setup files created in v1.xx & v2.00 are not compatible with v2.01 firmware