

# FITTING THE 19" RACK EARS


## 1) CHECK THE CONTENTS:

Please carefully check that both the Rack Ears are present in the kit. They are not identical – one is for the left side and one is for the right.

- 1x ZED1802RK19 Rack Ears (AA8558-L/R)
- 8x M6 x 16 Pan Slotted screws (AB0344)
- 8x M6 Cup Washers (AB0345)
- 6x M4 x 8 Pan Pozi screws (AB4836)
- 1x ZED 18 19" Rack Ears Fitting Instructions (AP8786)

## 2) TOOLS REQUIRED:

1pt CROSS POINT SCREWDRIVER




## 3) ENSURE POWER IS DISCONNECTED

Before attempting to fit the Rack Ears, remove all power to the unit and disconnect any signal cables where necessary.


## 4) FITTING THE RACK EARS

To fit the Rack Ears first remove the 4 screws from each plastic side trim and take off the side trims. Save the screws in case the side trims need fitting in the future.

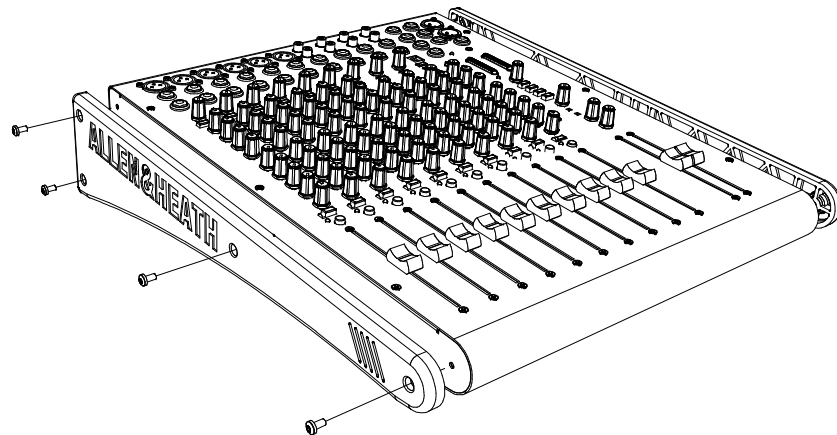

## 5) FIXING THE RACK EARS

Fit the rack ears to the left and right sides using the six M4 x 8mm screws provided with the kit. Do not use the 12mm screws that were used to fix the side trims.

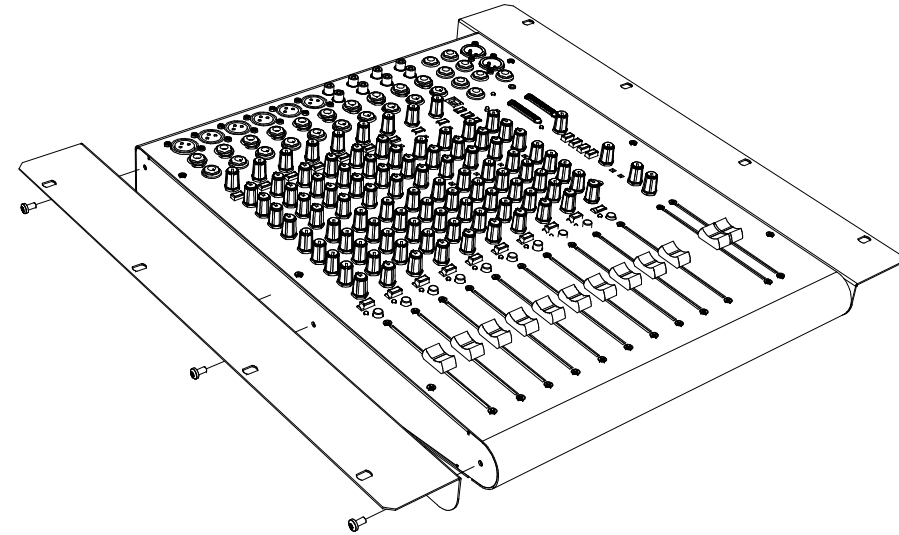

## 6) RACK INSTALLATION

Insert the 8 M6 Cup Washers into the Rack ears, then attach to a suitable rack unit using the 8 M6x16 Pan Slotted screws provided.

**ALLEN&HEATH**



## **19" RACK EARS OPTION**

This option enables you to fit 19" Rack Ears to ZED 18/16FX mixer.

**Kit Part No: ZED1802-RK19**

User option to fit 19" Rack Ears to one ZED 18 or 16FX unit.

## **FITTING INSTRUCTIONS**

**ALLEN&HEATH**

Manufactured in the UK by:  
Allen & Heath Limited  
Kernick Industrial Estate,  
Penryn,  
Cornwall TR10 9LU  
U.K.  
Tel: 44 (0) 1326 372070  
Fax: 44 (0) 1326 377097  
<http://www.allen-heath.com>

Publication **AP8786**  
Issue 2 March 2017