


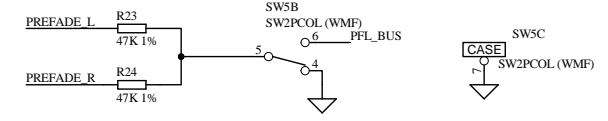
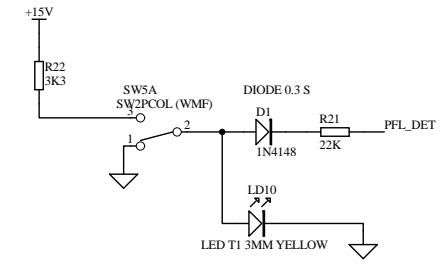
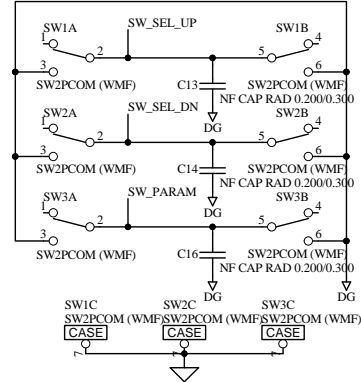
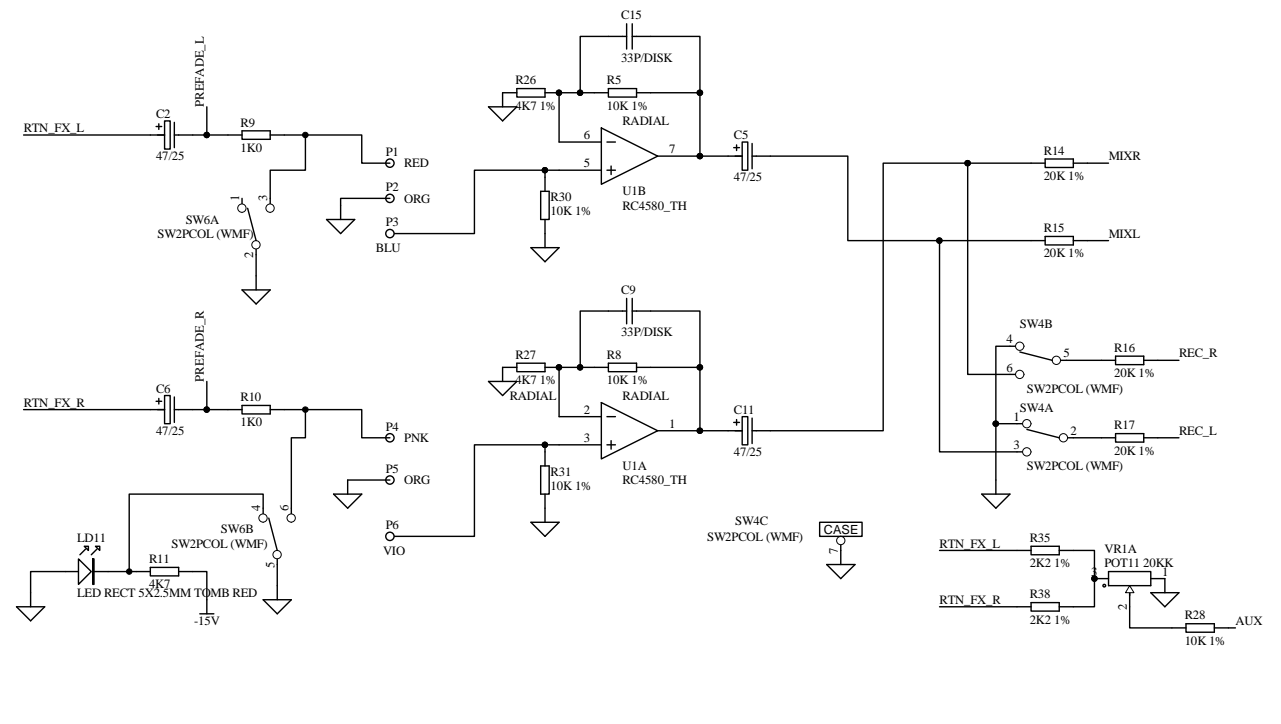
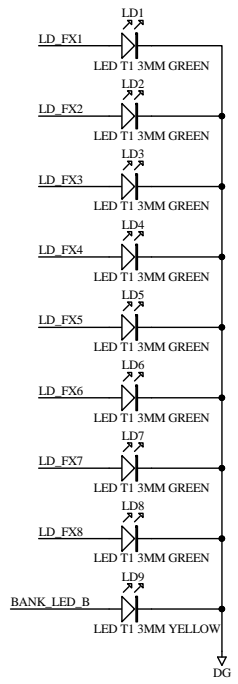
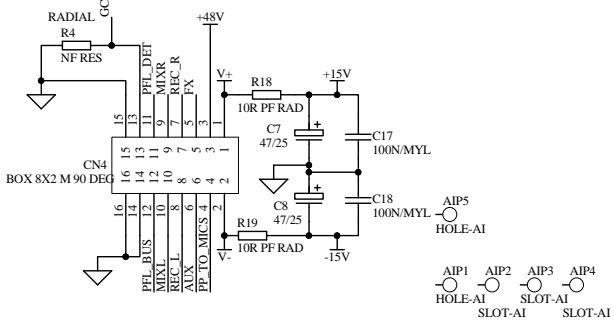


ATE1 HOLE-TOOLING 3.5MM
 ATE2 HOLE-TOOLING 3.5MM
 ATE3 HOLE-TOOLING 3.5MM

REC OUT

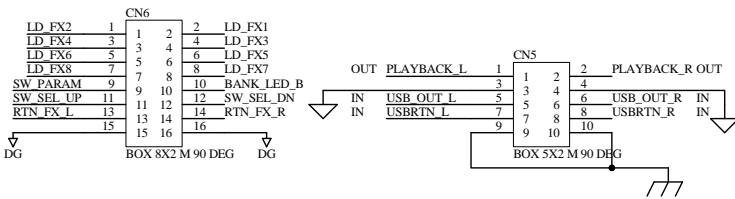

PLAYBACK INPUT

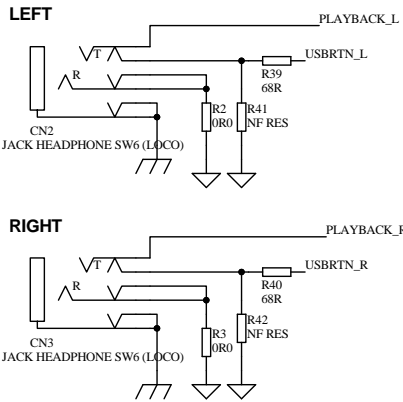


ALLEN&HEATH
 Kernick Industrial Estate,
 Penryn, Cornwall,
 England. TR10 9LU
 Tel: +44 (0)8707 556250
 Fax: +44 (0)8707 556251

ISSUE	BY	DATE	CHK BY
A	MG AAT	30/01/12	

VR1B POT11 20KK	SW6C SW2PCOL (WMF)	LK1 LINK TCW	LK3 LINK TCW	LK5 LINK TCW	LK7 LINK TCW
		LK2 LINK TCW	LK4 LINK TCW	LK6 LINK TCW	LK8 LINK TCW

TITLE: **ZED60 MINI FX CHANNEL**
 PAGE:
 DRG No: **C8716** ISSUE: 1 SHEET: 1 OF 1

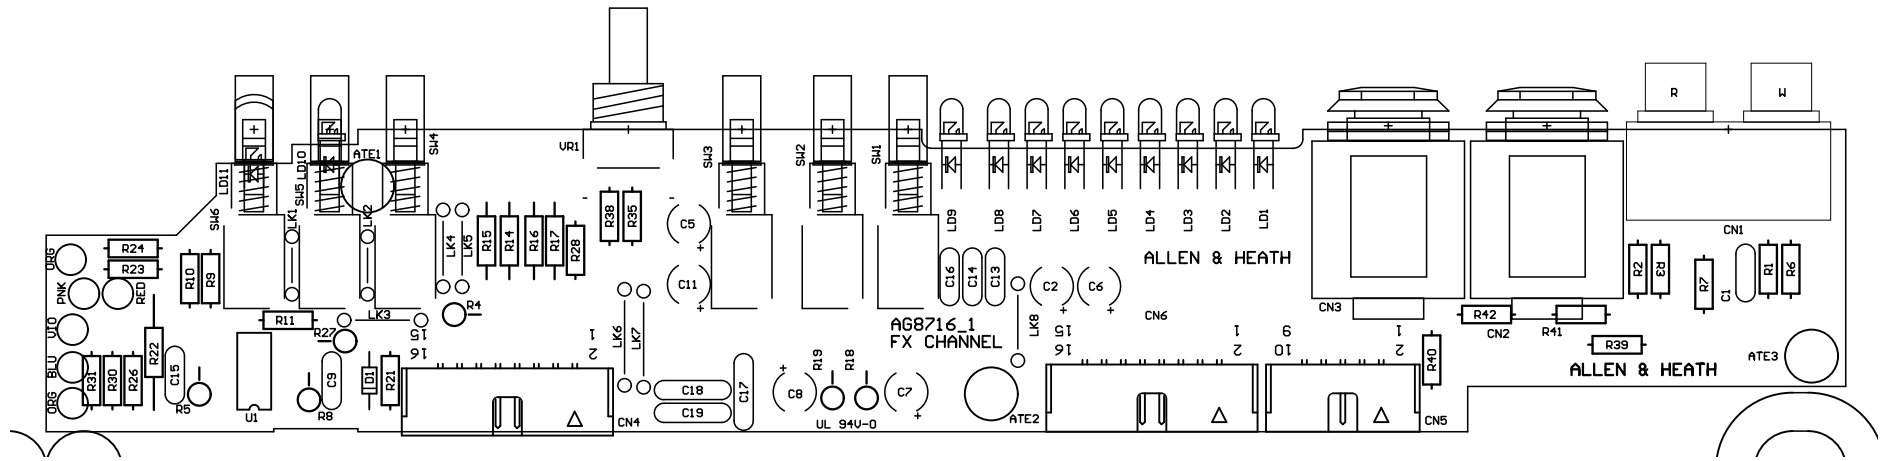

Designator	Description	A&H PART
AIP1	AI HOLE 3.1 mm	NO PART
AIP2	AI/ATE SLOT 5.1mm x 3.1 mm	NO PART
AIP3	AI/ATE SLOT 5.1mm x 3.1 mm	NO PART
AIP4	AI/ATE SLOT 5.1mm x 3.1 mm	NO PART
AIP5	AI HOLE 3.1 mm	NO PART
ATE1	HOLE TOOLING 3.5 mm	NO PART
ATE2	HOLE TOOLING 3.5 mm	NO PART
ATE3	HOLE TOOLING 3.5 mm	NO PART
C1	CAPACITOR MYLAR 10NF 50V 10% (AF0358)	AF0358
C2	CAPACITOR ELECTROLYTIC 47uF 25V (AF0208)	AF0208
C5	CAPACITOR ELECTROLYTIC 47uF 25V (AF0208)	AF0208
C6	CAPACITOR ELECTROLYTIC 47uF 25V (AF0208)	AF0208
C7	CAPACITOR ELECTROLYTIC 47uF 25V (AF0208)	AF0208
C8	CAPACITOR ELECTROLYTIC 47uF 25V (AF0208)	AF0208
C9	CAPACITOR DISK CERAMIC 33PF 100V (AF8161)	AF8161
C11	CAPACITOR ELECTROLYTIC 47uF 25V (AF0208)	AF0208
C13	CAPACITOR CAP RAD 0.200/0.300 NOT FITTED	NO PART
C14	CAPACITOR CAP RAD 0.200/0.300 NOT FITTED	NO PART
C15	CAPACITOR DISK CERAMIC 33PF 100V (AF8161)	AF8161
C16	CAPACITOR CAP RAD 0.200/0.300 NOT FITTED	NO PART
C17	CAPACITOR MYLAR 100NF 100V 10% (AF0160)	AF0160
C18	CAPACITOR MYLAR 100NF 100V 10% (AF0160)	AF0160
C19	CAPACITOR MYLAR 100NF 100V 10% (AF0160)	AF0160
CN1	RCA PHONO DUAL HORIZONTAL W/R (YKC21-3120 (PS3120)) (AL6830)	AL6830
CN2	JACK SOCKET HORIZONTAL 6 PIN HEADPHONE()loco (AL6893)	AL6893
CN3	JACK SOCKET HORIZONTAL 6 PIN HEADPHONE()loco (AL6893)	AL6893
CN4	Connector IDC,Molex Type 0.1" Pitch 8x2 pins (AL4335)	AL4335
CN5	Connector BOX,Molex Type 0.1" Pitch 5x2 pins Male 90 Deg (AL4334)	AL4334
CN6	Connector IDC,Molex Type 0.1" Pitch 8x2 pins (AL4335)	AL4335
D1	DIODE SIGNAL 1N4148 (AE0007)	AE0007
LD1	LED T1 3mm GREEN (AE0085)	AE0085
LD2	LED T1 3mm GREEN (AE0085)	AE0085
LD3	LED T1 3mm GREEN (AE0085)	AE0085
LD4	LED T1 3mm GREEN (AE0085)	AE0085
LD5	LED T1 3mm GREEN (AE0085)	AE0085
LD6	LED T1 3mm GREEN (AE0085)	AE0085
LD7	LED T1 3mm GREEN (AE0085)	AE0085
LD8	LED T1 3mm GREEN (AE0085)	AE0085
LD9	LED T1 3mm YELLOW (AE0084)	AE0084
LD10	LED T1 3mm YELLOW (AE0084)	AE0084
LD11	LED RECT 5x2.5MM TOMBSTONE RED (AE4863)	AE4863
LK1	TC WIRE LINK ,AH0070	AH0070
LK2	TC WIRE LINK ,AH0070	AH0070
LK3	TC WIRE LINK ,AH0070	AH0070
LK4	TC WIRE LINK ,AH0070	AH0070
LK5	TC WIRE LINK ,AH0070	AH0070
LK6	TC WIRE LINK ,AH0070	AH0070
LK7	TC WIRE LINK ,AH0070	AH0070
LK8	TC WIRE LINK ,AH0070	AH0070

R1	RESISTOR CARBON 0R0 1/4W 5% (AC0335)	AC0335
R2	RESISTOR CARBON 0R0 1/4W 5% (AC0335)	AC0335
R3	RESISTOR CARBON 0R0 1/4W 5% (AC0335)	AC0335
R4	RESISTOR CARBON NOT FITTED	NO PART
R5	RESISTOR METAL FILM 10K 1/4W 1% (AC0345)	AC0345
R6	RESISTOR METAL FILM 75R 1/4W 1% (AC4595)	AC4595
R7	RESISTOR METAL FILM 75R 1/4W 1% (AC4595)	AC4595
R8	RESISTOR METAL FILM 10K 1/4W 1% (AC0345)	AC0345
R9	RESISTOR CARBON 1K0 1/4W 5% (AC0031)	AC0031
R10	RESISTOR CARBON 1K0 1/4W 5% (AC0031)	AC0031
R11	RESISTOR CARBON 4K7 1/4W 5% (AC0044)	AC0044
R14	RESISTOR METAL FILM 20K 1/4W 1% (AC3997)	AC3997
R15	RESISTOR METAL FILM 20K 1/4W 1% (AC3997)	AC3997
R16	RESISTOR METAL FILM 20K 1/4W 1% (AC3997)	AC3997
R17	RESISTOR METAL FILM 20K 1/4W 1% (AC3997)	AC3997
R18	RESISTOR CARBON 10R PRE FORMED RADIAL 1/4W 5% (AC5077)	AC5077
R19	RESISTOR CARBON 10R PRE FORMED RADIAL 1/4W 5% (AC5077)	AC5077
R21	RESISTOR CARBON 22K 1/4W 5% (AC0050)	AC0050
R22	RESISTOR CARBON 3K3 1/4W 5% (AC0040)	AC0040
R23	RESISTOR METAL FILM 47K 1/4W 1% (AC4097)	AC4097
R24	RESISTOR METAL FILM 47K 1/4W 1% (AC4097)	AC4097
R26	RESISTOR METAL FILM 4K7 1/4W 1% (AC0331)	AC0331
R27	RESISTOR METAL FILM 4K7 1/4W 1% (AC0331)	AC0331
R28	RESISTOR METAL FILM 10K 1/4W 1% (AC0345)	AC0345
R30	RESISTOR METAL FILM 10K 1/4W 1% (AC0345)	AC0345
R31	RESISTOR METAL FILM 10K 1/4W 1% (AC0345)	AC0345
R35	RESISTOR METAL FILM 2K2 1/4W 1% (AC0039)	AC0039
R38	RESISTOR METAL FILM 2K2 1/4W 1% (AC0039)	AC0039
R39	RESISTOR CARBON 68R 1/4W 5% (AC0007)	AC0007
R40	RESISTOR CARBON 68R 1/4W 5% (AC0007)	AC0007
R41	RESISTOR CARBON NOT FITTED	NO PART
R42	RESISTOR CARBON NOT FITTED	NO PART
SW1	SWITCH DPDT WMF MOMENTARY (AL7206)	AL7206
SW2	SWITCH DPDT WMF MOMENTARY (AL7206)	AL7206
SW3	SWITCH DPDT WMF MOMENTARY (AL7206)	AL7206
SW4	SWITCH DPDT WMF LATCHING (AL6824)	AL6824
SW5	SWITCH DPDT WMF LATCHING (AL6824)	AL6824
SW6	SWITCH DPDT WMF LATCHING (AL6824)	AL6824
U1	IC RC4580 DUAL OP-AMP_TH (AE6911)	AE6911
VR1	POT ALPS 11mm 20KK 203K (AI8003)	AI8003